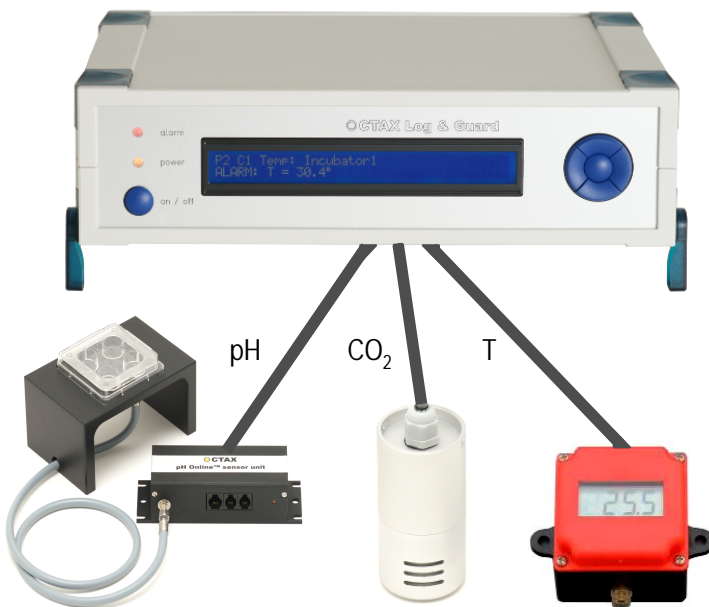# ⬡CTAX Log & Guard™

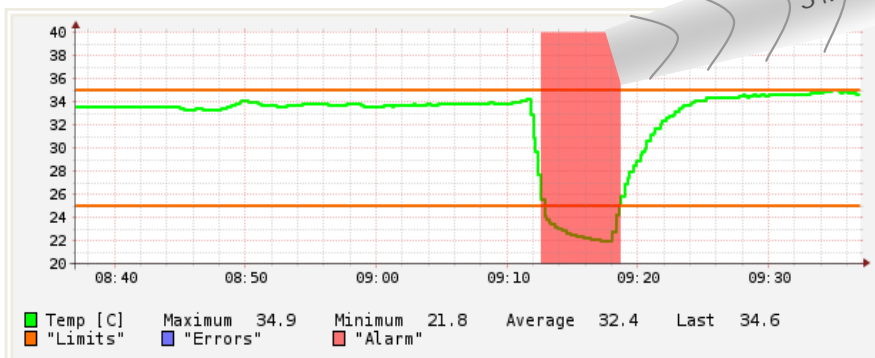## Many tasks – one solution!

OCTAX Log & Guard™ is the only monitoring and alarming system which has specifically been designed for the needs of A.R.T.

pH   CO₂   T

§ Independent monitoring and documentation of temperature from incubators, fridges, LN$_2$ tanks
pH of culture media via pH Online™
CO_2 from incubators
mains (battery backed)

§ SMS, audible, visual alarming

§ Web interface for data access and management

§ No PC required

Specifications:

Power supply: 110-240V AC, Dimensions: 360 x 300 x 90 mm (WxDxH), measuring intervals infinitely variable
Max. number of temperature sensors to be connected: 54
Max. number of pH Online™ sensors to be connected: 24
Max. number of CO_2 sensors to be connected: 180
SMS alarming requires SIM card

| ■ Temp [C] | Maximum | 34.9 | Minimum | 21.8 | Average | 32.4 | Last | 34.6 |
| ■ "Limits" | ■ "Errors" | ■ "Alarm" | | | | | | |